

3PU PATENTED

MAUI S3L FO SR

3H191I

CE EN ISO 20345:2022 S3L FO SR ESD

LOW SAFETY SHOE

36-49

3HYBRID Cushioning


Low safety shoe, MICROWASH thickness 1,8 - 2,0 mm.
Highly perspiring and abrasion resistant fabric lining.
Shoe with refracting fabric insert.
Soft, lined and padded tongue.

COMPLETELY METAL FREE SHOE

TOECAP 200J polymeric composite **non-thermic** according to EN 22568
PL MIDSOLE flexible antiperforation composite fabric according to EN 22568
SOLE 3 HYBRID three-densities polyurethane antistatic, resistant to hydrolysis ISO 5423:92, to hydrocarbons and to abrasion, anti-shock and anti-slipping
ANTI TORSION insert in the sole to assure stability on uneven ground
MEMORY INSOLE three-materials extra comfort insole, with soft latex Memory cushion, ensuring no stress in heel zone and resistant to body pressure.
Perspiring, removable, anatomic, absorbing, antistatic and anti-bacterial and ESD.

Footwear meets the requirement in accordance with IEC 61340-4-3:2017 (IEC 61340-5-1:2016) for electrical resistance **ESD**

FO sole resistance to hydrocarbons
SR sole resistance against slipping
Size 36-47 Shoe weight Sz 42 gr. 485

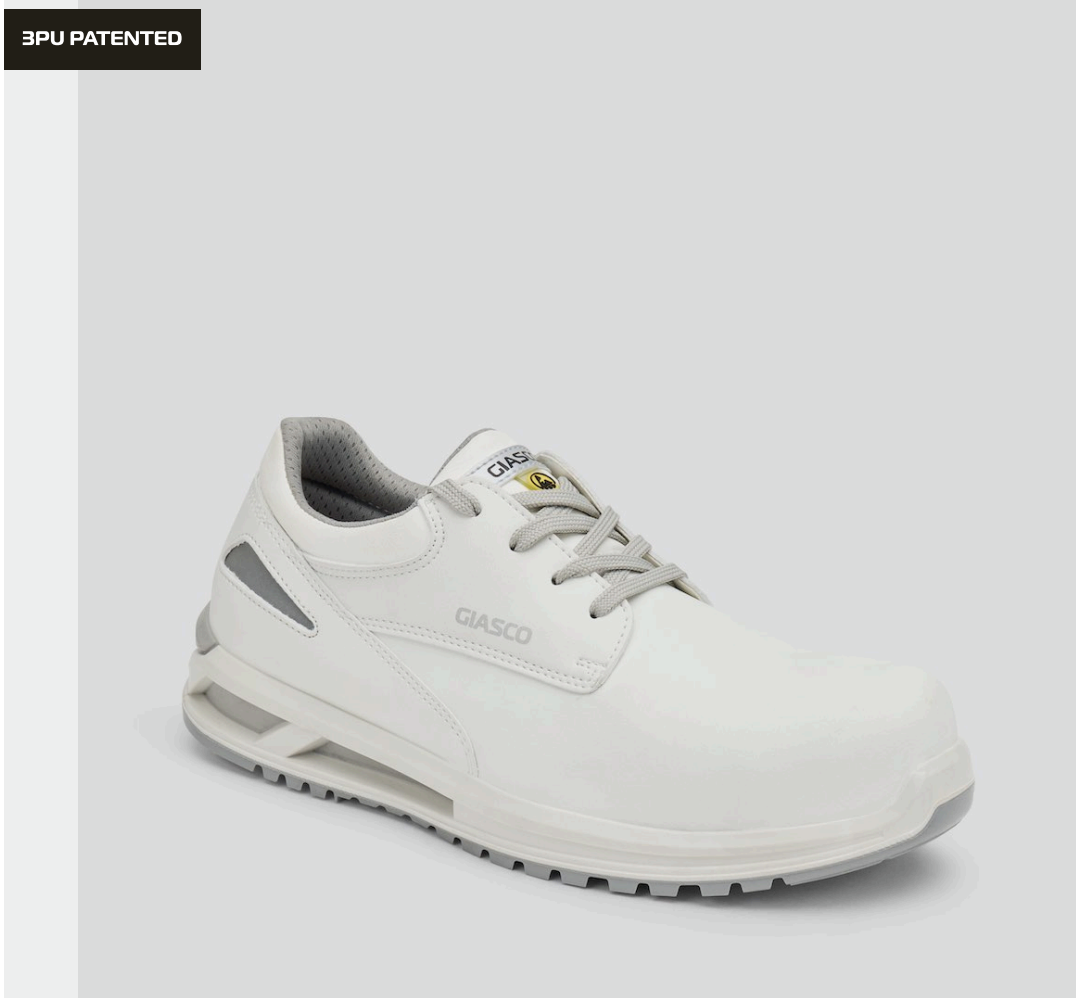

→ **AREAS OF APPLICATION**

Food, Hospital and Cleaning

Hotels, Restaurants and Catering

ESD Area

→ **CERTIFICATIONS APPLIED**

Water Penetration and Absorption (WPA)

Antistatic Footwear

DGVU 112-191

PL Puncture Resistance with Non-Metallic Insert (nail Ø 4.5mm)

Heel Energy Absorption

Acid Resistance

Slip Resistance (mandatory ceramic-Nals test)

Hydrocarbon Resistance

→ **TECHNOLOGIES AND MATERIALS**

No metal

Microwash

Slip Resistance (optional glycerin test)

Memory Foam Insole

ESD - Electrostatic Discharge

Mondo Point 11

Three to be™ - Triple Density Injection

Metal-Free

Extreme Lightness

Anti-Torsion Sole

→ **ANTI-SLIP RESULTS**

*after simulation of walking by slight abrasion

| | | | | | |
|------------------------------|---------------------------------------|--|----------------------------------|---------------------------------------|--|
| Ceramic tile floor with NaLS | Forward Heel (heel slip 7°) | Backward heel (heel slip 7°) | Ceramic tile floor with glycerin | Forward Heel (heel slip 7°) | Backward heel (heel slip 7°) |
| | ≥ 0.31 ≥ 0.47 | ≥ 0.36 ≥ 0.44 | | ≥ 0.19 ≥ 0.23 | ≥ 0.22 ≥ 0.25 |

↳ PLUS



Microwash

Microwash is a highly breathable microfiber material designed to provide comfort and hygiene in industries such as food and healthcare, and to facilitate necessary cleaning. Its breathable polyurethane finish gives it a full-grain leather appearance while combining lightness and durability. Compared to natural leather, microfiber is 40% lighter, reducing fatigue even during long shifts. Another key feature is that it does not yellow when exposed to sunlight.



Three to be™ - Triple Density Injection

Three to Be® - Tripla Densità Iniettata technology represents one of the most advanced results of our R&D efforts. Patented by Giasco, it integrates three entirely polyurethane-injected sole layers to optimize safety shoe performance in terms of comfort, stability, and slip resistance.



Anti-Torsion Sole

The Anti Torsion system uses a thermoplastic shank designed to increase stability on irregular and wet surfaces. Unlike standard shanks, it flexes with the foot's natural motion, reducing the risk of twists and falls. Ideal for outdoor work, especially in construction, where surface control is critical.



Memory Foam Insole

The MEMORY FOAM insole offers superb comfort thanks to its innovative material, which adapts to foot shape. It enhances walking comfort, supports posture, improves fit, and distributes body weight. Additionally, it stabilizes the foot and absorbs ground impact, serving as an excellent shock absorber.



Acid Resistance

The sole of the following footwear has undergone laboratory testing for chemical resistance determination in accordance with a procedure similar to EN 13832-3:2018.

Specifically, the sole was tested for resistance against the following substances: N, P, R, K, NaCl 37%.

The upper material was also tested in the laboratory to determine chemical resistance according to a procedure similar to EN 13832-3:2018. Specifically, black MICROWASH was tested for resistance to: K. White MICROWASH was tested for resistance to: N, P, R, K, NaCl 37%.

Legend: (K)= Sodium Hydroxide 40%; (N)= Acetic Acid 99% (N), (P)=Hydrogen Peroxide (30%), (R)=Sodium Hypochlorite (13+-1%) of Active Chloride, (NaCl)= Sodium Chloride 37%

↳ SOLE

3HYBRID Cushioning

3Hybrid is a line that, thanks to the sole design, ensures maximum shock absorption and energy return throughout the entire lifespan of the safety footwear. These high cushioning properties are provided on one hand by the special low-density, ultra-soft compounds and on the other by a three-dimensional lateral design that maximizes the sole's elasticity. Also on the side of the work shoe, there is a spoiler designed to provide greater foot stability and firmness, thus maximizing protection. Lastly, this safety shoe features a tread with a specific lug pattern designed to offer excellent slip resistance for indoor and light outdoor environments.

